

MyPBX Application Firmware Update

You can update firmware through the following two ways:

1. Update through TFPT

Step 1: Download the update file. (e.g. M01-1.0.0.6.bin)

Download link: <http://www.yeostar.com/download/MyPBX/M01-1.0.0.6.bin>


Step 2: Create tftp Server (For example, tftpd on Windows)

1) Install tftpd32 software on computer


Download link: http://tftpd32.jounin.net/tftpd32_download.html

2) Configure tftpd32

On option 'Current Directory', click 'Browse' button, choose the firmware file of MyPBX upgraded patch, such as C:\Image\M01-1.0.0.6.bin

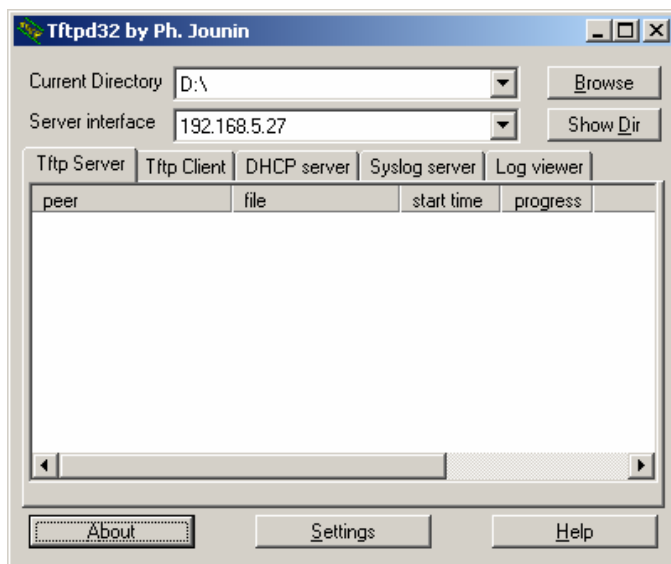


Picture-01

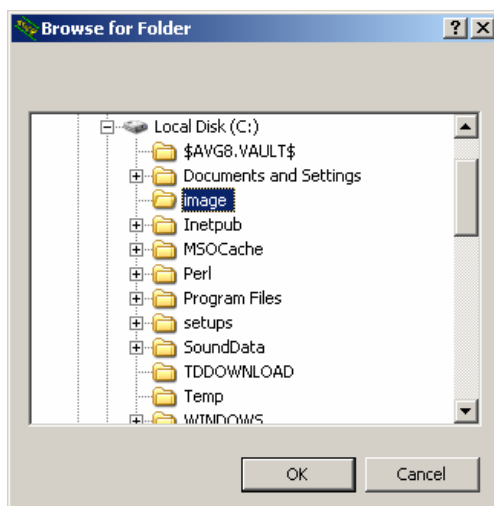

Picture-02

Step 3: On MyPBX's configuration page, select **System Settings**→**Firmware update**→**Download Image From A** , choose '**TFTP Server**':

- 1) TFTP Server: fill in IP address of tftpd32 server, such as 192.168.5.27
- 2) File Name: enter the name of firmware update, such as M01-1.0.0.6.bin
- 3) Click 'Start' to upgrade

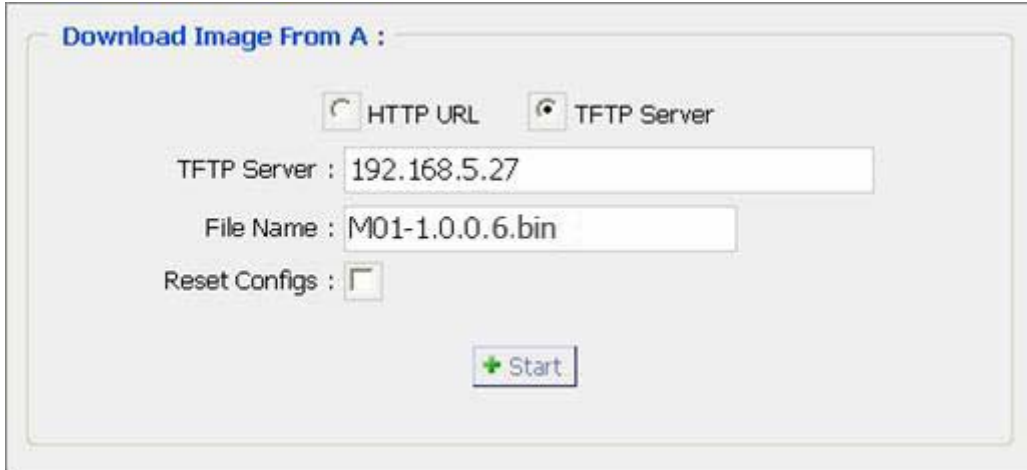

The screenshot shows a web form titled "Download Image From A :". It has two radio buttons: "HTTP URL" (unselected) and "TFTP Server" (selected). Below the radio buttons, there are three input fields: "TFTP Server" containing "192.168.5.27", "File Name" containing "M01-1.0.0.6.bin", and "Reset Configs" with an unchecked checkbox. At the bottom center is a "Start" button with a green plus icon.

Picture-03

1. Update through HTTP

On MyPBX's configuration page, select **System Settings** → **Firmware update** → **Download Image From A** , choose '**HTTP Server**':

- 1) HTTP URL: enter the update image file download link.
Example: <http://www.yeostar.com/download/MyPBX/M01-1.0.0.6.bin>
- 2) Click 'Start' to upgrade



The screenshot shows a web form titled "Download Image From A :". It has two radio buttons: "HTTP URL" (selected) and "TFTP Server" (unselected). Below the radio buttons, there is one input field: "HTTP URL" containing ".com/download/MyPBX/M01-1.0.0.6.bin". Below the input field is "Reset Configs" with an unchecked checkbox. At the bottom center is a "Start" button with a green plus icon.

Picture-04

Note:

1. If enabled 'Reset configs', MyPBX will restore to factory default settings.
2. If you're failed to upgrade through HTTP, please try again by TFTP way.
3. If you're again failed through TFTP upgrade way, please turn off your computer's firewall, and then retransfer.

If the update is successful, you will see the version info. on system information.